

# TAYLOR<sup>®</sup>


## POWER SYSTEMS

Model: **P75PM**

Unit Ratings:

	60Hz
Standby: kw/kva	75
Prime: kw/kva	67

Alternator Ratings at 1.0 Power Factor

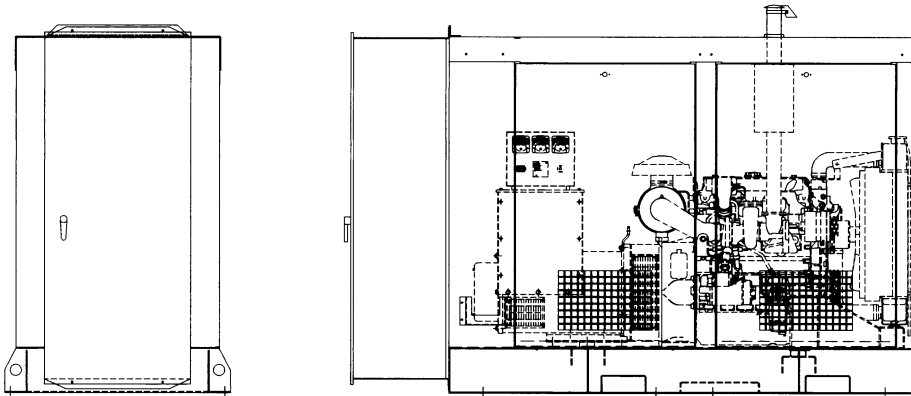

## Features

- Single source responsibility for the generator set and accessories.
- Prototype and production tested to insure one step load acceptance per NFPA 110.
- Two year limited warranty on generator sets and accessories.
- Unit conforms to CSA, NEMA, EGSA, ANSI and other standards.
- Automatic Transfer Switch/Switches mounted and wired
- Output breakers to houses pre-wired to automatic transfer switch
- Analog control system with an ECU-88 providing metering and monitoring.
- Heavy duty 4 cycle industrial engine for reliability and fuel efficiency.
- Brushless rotating field generator with class H insulation.
- Heavy duty steel base with integral vibration isolators.
- Weather housing
- 12V battery and charger pre-wired
- Engine block heater pre-wired

# APPLICATION & ENGINEERING DATA

## ENGINE

Engine Specifications	60 Hz	50 Hz
Manufacturer	Perkins	
Engine, model, type	1004TG2 4 Cycle	
Cylinder arrangement	4 vertical, in-line	
Displacement, cu. in. (L)	243 (3.99)	
Bore and stroke, in. (mm)	3.9 (100) x 5 (127)	
Compression ratio	16:1	
Piston speed, ft./sec. (m/sec)	25 (7.62)	20.8 (6.35)
Rated rpm	1800	1500
Max. power at rated rpm, hp (kw)	115.3 (86)	99.5 (74.2)
Cylinder head material	Cast iron	
Crankshaft material	Forged steel	
Governor type	Mechanical	
Frequency regulation, no load to full load	3-5%	
Frequency regulation, steady state	±0.8%	
Air cleaner type, all models	Dry paper element	
Combustion air, cfm (m <sup>3</sup> /min.)	257 (7.28)	200 (5.69)

## EXHAUST

Exhaust System	60 Hz	50 Hz
Exhaust flow at rated kW, cfm (m <sup>3</sup> /min.)	600 (17)	494 (14)
Exhaust temperature at rated kW, dry exhaust, °F (°C)	1018 (548)	1104 (596)
Maximum allowable back pressure, in. Hg (kPa)	1.77" HG (6 kPa)	
Exhaust outlet size at hookup, in. (mm)	2.26" (57.6)	

## ENGINE ELECTRICAL

Engine Electrical System	60 Hz	50 Hz
Battery charging alternator:		
Ground (negative/positive).....	Negative	
Volts (DC).....	12	
Ampere rating.....	45	
Starter motor rated voltage (DC)	12	
Recommended battery cold cranking amps (CCA) rating for 0°F (-18°C)	800	
Quantity of batteries	1	
Battery voltage (DC)	12	

## FUEL

Fuel System	60 Hz	50 Hz
Fuel supply line, min. ID, in. (mm)	5/16 (7.93)	
Fuel return line, min. ID, in. (mm)	1/4 (6.35)	
Max. lift, engine-driven fuel pump, ft. (m)	6' (1.8)	
Max. fuel flow, gph (Lph)	23.5 (89.1)	25.9 (98.1)
Fuel prime pump	manual	
Fuel filter	spin on	
Recommended fuel	#2 diesel	

## FUEL CONSUMPTION

Fuel Consumption	60 Hz	50 Hz
<b>Diesel, gph (Lph) at % of load</b>		
100%	5.4 (20.4)	4.7 (17.9)
75%	4.08 (15.7)	3.5 (13.3)
50%	2.9 (11.2)	2.4 (9.2)

## COOLING

Cooling System	60 Hz	50 Hz
Ambient temperature °F (°C)	127.4 (53)	
Radiator system capacity, including engine, gal. (L)	5.85 (22.2)	
Engine jacket water flow, gpm (Lpm)	25.6 (97)	21 (80)
Heat rejected to cooling water at rated kW, dry exhaust Btu/min.	2957	2672
Water pump type	centrifugal	
Fan diameter, including blades, in. (mm)	20 (508)	
Fan hp (kW)	3.85 (2.87)	2.53 (1.89)
Max. restriction of cooling air, intake and discharge side of rad., in. LBF in <sup>2</sup> (kPa)	5.0 (35)	
Radiator-cooled cooling air, cfm (m <sup>3</sup> /min.)	4600 (130)	3539 (100)

## LUBRICATION

Lubricating System	60 Hz	50 Hz
Type	Full Pressure	
Oil pan capacity with filter, qts. (L)	7.26 (6.9)	
Oil filter, quantity, type	1 spin on	
Oil cooler	integral water cooled oil cooler	

## ANALOG CONTROL PANEL

- Taylor Power Systems Analog Auto Start Control Panel. The panel is equipped with AC Voltmeter, AC Frequency Meter, Percent of Load Meter, Running Time Meter, Control Toggle Switch with Off/Auto/Manual positions, and ECU-88 engine control with specific safety shutdown lights.
- Separate Oil Pressure and Water Temperature Gauge Located on Generator Set.
- Taylor Power Systems also supplies a manual key override by-pass switch that allows you to start the generator manually in the event of control systems failure.

## ECU-88 FEATURES

- Engine Started LED
- Overspeed Shutdown LED
- Overcrank Shutdown LED
- High Water Temperature Shutdown LED
- Low Oil Pressure Shutdown LED

The ECU automatically cranks, starts, and monitors the engine for Overcrank, Overspeed, High Water Temperature, and Low Oil Pressure. A built in speed switch uses a magnetic pickup to monitor engine speed for crank disconnect and overspeed. The bypass timer/logic assures Low Oil Pressure and High Water Temperature override during the crank period and an additional adjustable period after crank disconnect. The ECU monitors the Magnetic Pickup signal for problems during both cranking and running. If a problem is detected the engine will shutdown and Overcrank and Overspeed LED's will both turn on.

# **GENERATOR SPECIFICATIONS**

---

**Taylor Power Systems uses Full Output Rated 4 Lead design Single Phase Generators, which provide superior motor starting, and generator efficiency.**

## **STANDARDS**

UC224 and UC274 industrial generators meet the requirements of BS5000, VDE0530, UTE5100, NEMA MG1-22, CEMA, IEC34-1, CSA22.2 AND AS1359.

## **EXCITATION SYSTEMS**

With the self-excited systems the main stator provides power via the automatic voltage regulator (AVR) to the exciter stator. The high efficiency semiconductors of the (AVR) ensure positive build up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a full wave bridge rectifier. The rectifier is protected by a surge suppressor against surges caused, by short circuit.

## **INSULATION / IMPREGNATION**

The insulation system is Class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide protection against the harsh environments encountered in generator applications. Varnishes and resins are selected and developed to provide the high build required for static windings and the high mechanical strength required for rotating components.

## **WINDINGS & ELECTRICAL PERFORMANCE**

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non linear loads. The 2/3 pitch design avoids excessive neutral currents, sometimes seen with higher winding pitches, when in parallel with the mains.

A fully connected damper winding reduces oscillations during paralleling. This winding, with 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

## **TELEPHONE INTERFERENCE**

THF (as defined by BS4999 Part 40) is better than 2%. TIF (as defined by ASA C50.12) is better than 50.

## **RADIO INTERFERENCE**

The absence of brushgear and the high quality AVR ensure low levels of interference with radio transmissions.

Additional RFI suppression may be supplied if required.

## **ENCLOSURE**

IP22 (NEMA 1) is standard for all industrial generators Protection to IP23 (60 degrees from vertical) is available as an option at reduced ratings (5% derate).

Inlet air filters are available as an option on all generators, at reduced ratings (5% derate).

## **SHAFT**

All generator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation.

## **QUALITY ASSURANCE**

Generators are manufactured using production procedures having a quality assurance level to BS EN (ISO9001).

# STANDARD FEATURES AND ACCESSORIES

## Standard Features

- Heavy duty steel base
- Vibration isolators
- Battery
- Battery rack
- Battery cables
- Battery Charger
- Water jacket heater
- Owners manual
- Spark arresting muffler
- Flex Fuel Lines
- Weather Housing
- Automatic Transfer Switch
- Output Breakers to Load
- PMG Exciter

## Accessories

- Generator strip heater
- Line circuit breaker
- Pre-fab mounting pad  
(eliminates pouring concrete)


## Accessories

- Sub-base fuel tank
- Above ground fuel tank
- Oil pan heater
- Battery heater
- Electronic isochronous governor
- PMG Exciter

## WEIGHTS AND DIMENSIONS P75PM

Overall Size, L x W x H, in.: (101" x 40" x 65")

Weight (wet): 2050 Lbs.

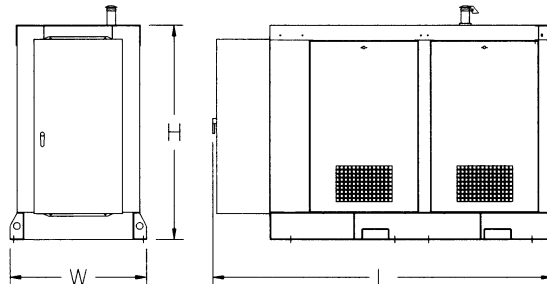

Note: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

Availability is subject to change without notice. Taylor Power Systems reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.  
Availability can be determined by contacting Taylor Power Systems.

# TAYLOR

## POWER SYSTEMS

461 Hwy. 49S

Richland, Mississippi 39218

Phone (601)-932-5674

Toll Free 1-800-367-7639

FAX (601)-932-4028

Web Site [www.taylorbigred.com](http://www.taylorbigred.com)

## DISTRIBUTED BY: